



Natural Nuances 9220, 9030 and 9240



Specification according to EN 1307

Type of manufacture	Tufted 1/10" Loop pile	ISO 2424
Pile fibre composition	Solution dyed BCF Polyamide 6 ECONYL® (ECONYL® is made from 100% regenerated content*)	ISO 2424
Dimensions	50 x 50 cm / 19.68" x 19.68" (20 tiles per box)	EN ISO 24342
Primary backing	Polyester fleece	ISO 2424
Secondary backing	Desso ProBase Polyver®	ISO 2424
Total thickness	5.5 mm 0.2 inch	ISO 1765
Effective pile thickness	2.4 mm 0.09 inch	ISO 1766
Total mass	4000 g/m² 118.1 oz/yd²	ISO 8543
Total pile mass	600 g/m² 17.7 oz/yd²	ISO 2424
Effective pile mass	360 g/m² 10.6 oz/yd²	ISO 8543
Pile density	0.150 g/cm³ 0.0054 lb/in³	ISO 8543
Number of tufts	1580/dm² 132104/yd²	ISO 1763
Stroll test	≤ 2.0 kV	ISO 6356
Vertical resistance	≤ 1 x 10⁹ Ohm	ISO 10965
Use classification	33 Commercial - heavy use	EN 1307
Dimensional stability	≤ 0.2 %	EN 986
Impact sound reduction ΔL _w	23 dB	ISO 10140
Noise reduction	0.15 α _w	ISO 354
Flammability	B _{f1} - s1 (loose laid tested)	EN 13501-1
Light Reflectance Value (LRV)	See right side page per colour	BS 8493
Colour depth (L)	See right side page per colour	CIELAB

* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: www.desso.com.

** LRV colours will be delivered standard with an EcoBase backing.

with ProBase™ backing




with EcoBase™ backing



Manufactured by

Tarkett BV
PO Box 169
NL-5240 AD
Waalwijk

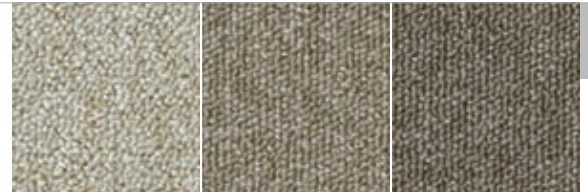

9010**
L 65,50 / LRV 34,68

9020
L 51,82 / LRV 19,98

9030
L 43,60 / LRV 13,56



9040
L 35,05 / LRV 8,52

9050
L 26,20 / LRV 4,81


9060
L 17,88 / LRV 2,49



9110**
L 63,32 / LRV 31,97

9120
L 53,44 / LRV 21,45

9150
L 23,42 / LRV 3,92

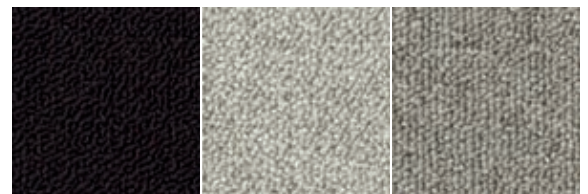

9160
L 15,80 / LRV 2,06

9210**
L 67,89 / LRV 37,82


9220
L 57,60 / LRV 25,54



9240
L 39,61 / LRV 11,02

9250
L 26,50 / LRV 4,92


9260
L 21,88 / LRV 3,48

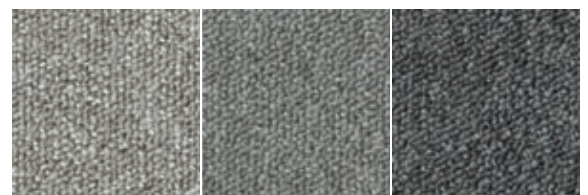

9320
L 57,44 / LRV 25,38

9330
L 50,42 / LRV 18,77

9340
L 37,70 / LRV 9,92

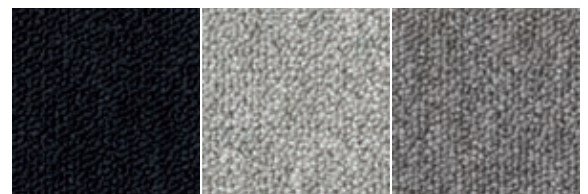

9360
L 16,99 / LRV 2,30

9410**
L 63,89 / LRV 32,66

9420
L 48,57 / LRV 17,25



9430
L 37,13 / LRV 9,61


9440
L 31,33 / LRV 6,79

9460
L 21,26 / LRV 3,31


Natural Nuances




Natural Nuances 9410, 9420, 9430, 9440, 9550 and 9460



9510**
L 60,72 / LRV 28,93




9530
L 48,13 / LRV 16,89




9540
L 41,77 / LRV 12,35




9550
L 25,02 / LRV 4,42



9560
L 17,93 / LRV 2,50



9610**
L 63,28 / LRV 31,93




9630
L 46,86 / LRV 15,91




9640
L 37,58 / LRV 9,86



9660
L 16,80 / LRV 2,26



9710**
L 58,18 / LRV 26,15




9720
L 55,10 / LRV 22,93




9730
L 46,19 / LRV 15,41



9740
L 41,42 / LRV 12,13



9810**
L 60,95 / LRV 29,19



9820
L 47,16 / LRV 16,14




9830
L 41,01 / LRV 11,87




9850
L 20,98 / LRV 3,24




9860
L 14,84 / LRV 1,88



9910**
L 60,68 / LRV 28,89



9920
L 47,12 / LRV 16,11



9930
L 46,28 / LRV 15,47



9940
L 29,13 / LRV 5,89



9950
L 21,94 / LRV 3,50



9960
L 16,51 / LRV 2,20