TECHNICAL SHEET


MOSS
ecoBACK


CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% Econyl PA6 Solution Dyed Nylon 100% regenerated
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK: designed for easy disassembly, with minimum 75% recycled* and renewable content
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.900 g/m² Ca. 115.0 oz./yd²
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 880 g/m² Ca. 26.0 oz./yd²
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 590 g/m² Ca. 17.4 oz./yd²
TOTAL HEIGHT EPAISSEUR TOTALE GESAMTDICKE TOTALE DIKTE	Ca. 7,5 mm Ca. 0.3"
PILE HEIGHT EPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 4,3 mm Ca. 0.17"
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0,137 g/cm³ Ca. 3.696 oz./yd³
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 225.000 /m² Ca. 188,129/yd²
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC2
CASTOR CHAIR SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN ISO 4918 A: continuous use
CRADLE TO CRADLE® CERTIFIED	Gold level according to version 4.0 130, 306, 557, 910, 957 Silver level according to version 4.0 180, 230, 578, 639, 850, 936, 966


FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B_{fl}-s1
FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLAßWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,086 m² K/W
IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL_w: 24 dB
SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α_w: 0,15
PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 10^9 Ohm
SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 x 50 cm 19.7" x 19.7" box: 5 m² | 5.98 yd² pallet: 20 boxes
NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	12
DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
GUT-NR	BE1E1ACC
BUILDING CERTIFICATION SCHEMES	Products can contribute to achieving credits under building certification schemes (e.g. BREEAM, LEED, WELL).**
DGNB	modulyss is member of DGNB, the German Sustainable Building Council.

*RECYCLED CONTENT - BQA QA-CER recycled content management system certificate

**See modulyss sustainability datasheets for details on potential credit contributions by scheme. Products are not independently certified under building certification schemes. Credit achievement is assessed at project level and depends on the overall performance of materials, systems, design, and scheme-specific criteria.





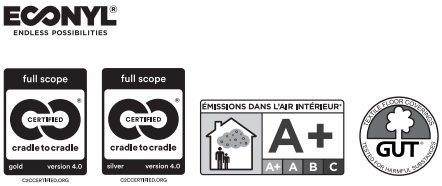

modulyss®

M0525 We reserve all rights for technical improvements | Technische wijzigingen, ter verbetering van het product, worden voorbehouden | Sous réserve de toute modification technique visant à l'amélioration constante de nos produits | Durch technische Weiterentwiklung sinds bedingte Anderungen vorbehalten